A calmer arrival.
A practical family reception.

DESIGN REVIEW · SITE / ENGINEERING HOLD

Recommendation: develop A Calm Contemporary with the shared measured layout. Investigate conditional P1/F1 only after written wall and service approval; A/P0 is the complete enclosed fallback.



A-P0 · entry-overview
scene-9e86635b · PNG ca2cfd44662ecae3
camera 42edc81f772d · architecture 74234e98afe7



B-P0 · entry-overview
scene-a7da4c73 · PNG bd3ecdb466aa8eca
camera 42edc81f772d · architecture 74234e98afe7

Measured model improvement	Source → developed
Chair–shoe box gap, all six chairs +350mm	**35 → 915mm**
Open buffet to nearest chair, +350mm	**585 → 785mm**
Entry door sweep versus shoe user	22/46 intersections → 0/46
Assumed entry clear box volume	**145.2 → 93.0L** (36% less)

> The entry proposal improves collision results, but its six-pair capacity is unverified. At +450mm chair withdrawal, the shoe user's gap to the nearest chair is only **15mm**: no bypass or physical comfort claim.

32 genuine WebGL frames, eight provenance-labelled contact sheets and six dimensioned plans support this recommendation. The renderer uses visual material/light proxies. Real household mockups, samples and coordinated engineering are still required.


Measured operating-state plan

Developed common layout · all six chairs +350mm · explicit adult envelopes, open fronts/users and sampled original door leaves. Dimensions are model calculations, not site measurements.

Developed A / P0 · six chairs +350 mm

Type B v0.2.2 | ceiling 2500 | model mm / use envelopes assumed | NOT FOR CONSTRUCTION

Source scene-9cf45a73 | candidate scene-9e86635b | separate cloud scene-4821689 / v55 | canonical 734b1c36570f…

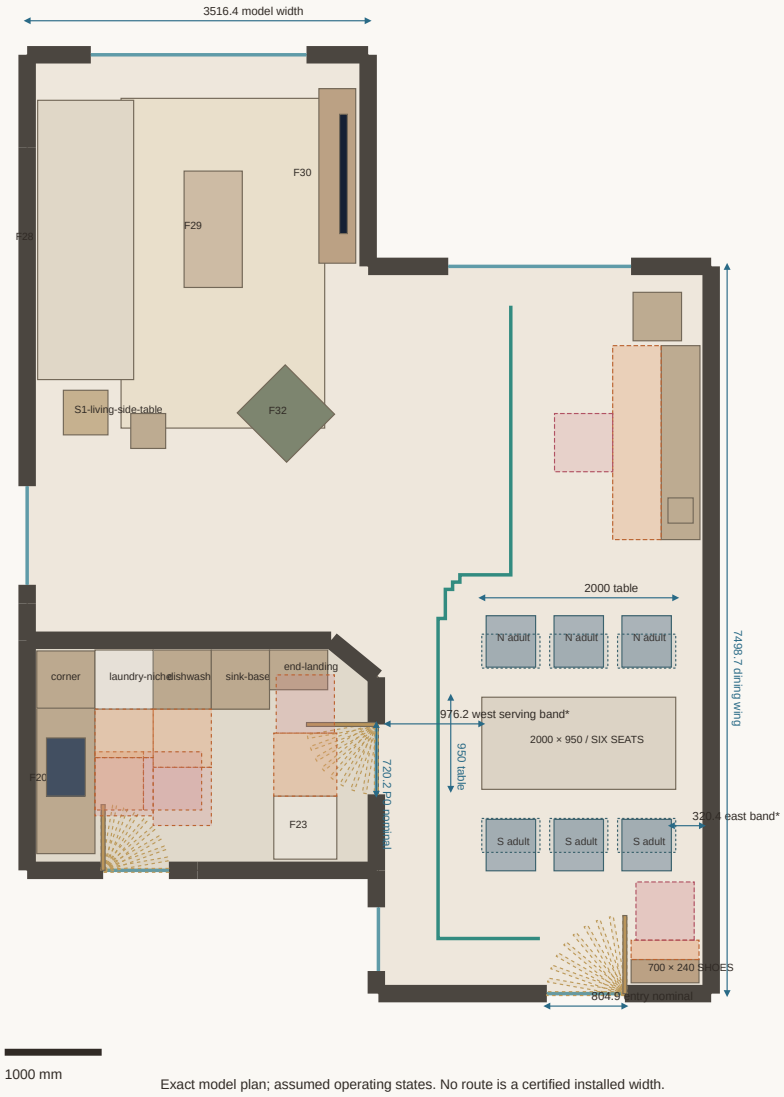

LEGEND

Exact polygons and furniture; assumed bodies/doors

Blue chairs
All SIX chairs +350 mm; 510 × 530 nominal

Orange
Open leaf / tilt / appliance projection

Rose
600 × 600 operating adult proxy

Gold
2° sampled door sweep + fully open leaf

Green
700 mm tray sensitivity route: MODEL_ROUTE_FOUND

Chair / shoes
nearest box gap 915 mm

Chair / shoe user
gap 115 mm

Buffet open / chair
gap 785 mm

DW open / south wall
972.3 mm*

DW + user / south wall
372.3 mm*

Model doorway
Kitchen 720.2 / main entry 804.9 nominal

P1 only on separate study
Wall 44 omission = 1207.4 nominal / ENGINEER HOLD

* nominal face assumption
90mm wall half. Not site finished clearance.

USE LIMIT
Do not add all kitchen actors as simultaneous comfort

APPROVAL
No site, procurement or structural release

Scale bar
1000mm (print dimensions independent of resizing)

Exact model plan; assumed operating states. No route is a certified installed width.

Read with the +200 and +450 plans. A 700mm circular circulation proxy uses a 75mm grid with 53.0mm radial safety pad. Route endpoints stay inside the entrance/kitchen/terrace. The green line does not certify installed door widths, accessibility or six-adult comfort.

West serving band **976.2mm** is the stricter polygon-derived allowance; the partition-axis face calculation is 997.4mm. Preserve the source's 21.2mm discrepancy. East dining band 320.4mm is unsuitable as a through-route. Vector plan: zoom for labels; original SVGs are included.

Two coherent interiors



A-P0 · wide-reception
scene-9e86635b · PNG c55cc729a3a6615e
camera f43116963715 · architecture 74234e98afe7




B-P0 · wide-reception
scene-a7da4c73 · PNG 12a3ec962e4d0a43
camera f43116963715 · architecture 74234e98afe7


A / Calm Contemporary
Warm ivory, pale oak, a light mineral floor, quiet TV face and an olive accent chair. Pendant removed; 3000K track and existing lamps keep the table volume clear.

B / Warm Contemporary
Muted walnut, taupe TV face and a 1000mm linear dining pendant. Same furniture footprints; richer contrast and a more defined table focal point.

Same view, daylight and evening

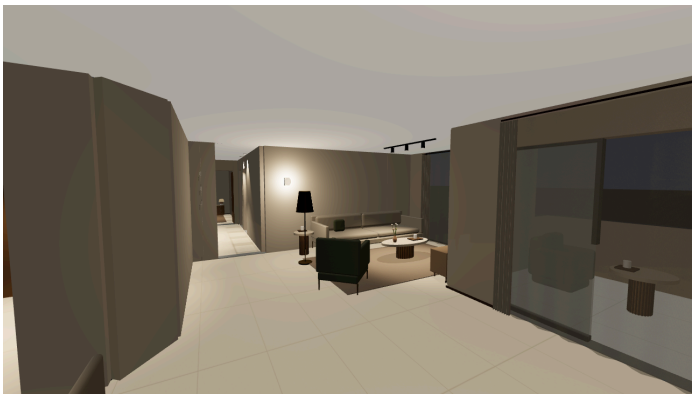

A-P0 · wide-reception-evening
scene-9e86635b · PNG 2b0d070c2325861a
camera c1ccfd49cc30 · architecture 74234e98afe7

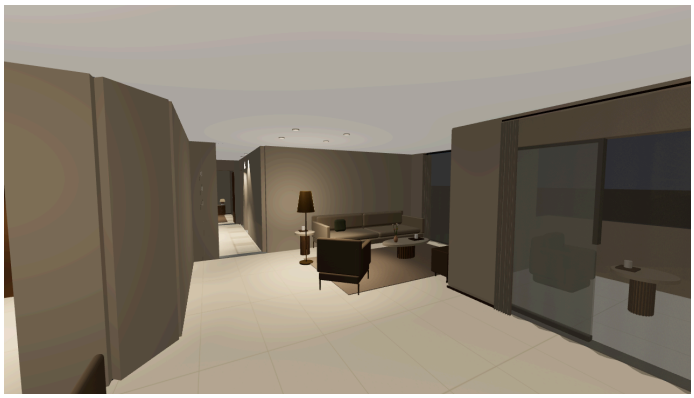

B-P0 · wide-reception-evening
scene-a7da4c73 · PNG 172181ab605dc7ad
camera c1ccfd49cc30 · architecture 74234e98afe7

A reads lighter in the evening; B needs a better real reading-light balance. A's bright left-wall lamp patch also needs aiming/dimming. Both show dark terrace glass at night; these are appearance studies, not lux or solar-glare calculations.

Keep the retained 2880×990 sofa, 2000×950 table and six 510×530 chairs. Sofa–coffee gap stays 520mm. B's pendant underside is 1730mm, 980mm above the table: test heads, serving and glare. No ceiling drop or hidden service void is approved.

Critical design review

KEEP the coherent direction and measured improvements. REVISE details that the evidence does not yet support. Neither generic viewer composition should be treated as exceptional finished joinery.

Criterion	A Calm Contemporary	B Warm Contemporary
Aesthetic / WOW	KEEP as lead: light buffet/art/table sequence and olive accent.	KEEP pendant focal point; REVISE combined dark buffet/TV mass.
Daily comfort	KEEP retained seating; actual knees, cushions and TV glare HOLD.	Same comfort; REVISE pendant height/beam through mockup.
Circulation	KEEP relocated shallow shoe unit and north-shifted buffet. REJECT east through-route.	Same measured layout; colour cannot improve clearance.
Storage	REVISE shoe capacity until inventory/real hardware pass. Keep full buffet.	Same storage trade-off; no extra food-storage volume claimed.
Material coordination	KEEP oak/mineral/olive; refine undertones and source brown doors.	KEEP restrained walnut; test taupe/wood warmth together.
Light / spaciousness	KEEP clear 2500mm volume; REVISE bright lamp patch and track aiming.	REVISE visibly darker sofa at night, downlight depth and glare.
Maintenance	KEEP closed buffet; REVISE retained slatted TV console cleaning/cable detail.	Same console risk; test veneer sealing and fingerprints.
Engineering	KEEP P0 fallback; kitchen concurrency and P1 wall/service approvals HOLD.	Same holds plus pendant circuit/head clearance.

> **Optional borrowing:** B's slender pendant may strengthen A's dining focus if a real lighting mockup is better. This is not a third rendered alternative or a purchase decision.

REJECT: historical K4/K12 imports, a new fixed serving-lane divider, storage totals based only on boxes, simultaneous oven/washer comfort claims, an invented ceiling drop, or wall-removal readiness inferred from successful rendering.

The broad dining wall remains intentionally quiet, but could feel plain. Better artwork, real veneer/stone/textile samples and disciplined lighting can supply refinement without adding circulation-blocking objects. Original TV console slats remain visible in both options.

P0 versus conditional P1/F1



A-P0 · kitchen-relationship
scene-9e86635b · PNG a74f488e7dec518d
camera 32c29091d35e · architecture 74234e98afe7



A-P1-CONDITIONAL · kitchen-relationship
scene-9e86635b · PNG 298cd2a62449cee7
camera 32c29091d35e · architecture cbd5f4ed08d2

P1 visibly opens the sink-run sightline. Nominal opening 720.2 → 1207.4mm: only wall 44's 487.2mm segment and the kitchen door mesh are omitted for review. Original appliances, service points and kitchen storage remain.

Operating issue	Result / decision
DW open + 600mm user	Only 372.3mm behind user; REJECT bypass. Service leaf/user gap 14.6mm is not a safe tolerance.
Fridge / P0 kitchen leaf	Opening/user intersects leaf sweep. P1 removes this leaf conflict only if permitted.
Service door / washer / oven	Washer user and generic oven opening intersect sweep; oven/washer users overlap 54,000mm².
Conditional under-hob oven test	143mm north of generic proxy: 87.2mm sampled sweep gap, but 39,700mm² user overlap remains.

Engineering gates: survey actual jamb/head/services; written developer/structural decision; hood/gas/extract/makeup air and noise; real product manuals and use mockups; floor/threshold buildup; portal finish and closure. A 783.8mm return cannot park a 1207.4mm full-width single hidden pocket.

> P1 is the preferred connection to investigate, not an approved buildable wall change. No closable odor screen has been selected. Choose P0 if structural/service/odor requirements cannot be met. Both preserve the kitchen storage run; appliance niches count as zero storage.

Implementation, proof and release holds

Genuine source-locked capture: the existing GitHub Actions production-viewer renderer captured 32 PNGs at 1280×720: two styles × P0/P1 × eight matched views. Every frame records the exact layout, camera, architecture overlay, source and PNG hashes.

- Standing eye 1680mm; seated TV eye 1100mm. Day/evening share pose and lens.
- Eight labelled sheets; six vector plans cover baseline/developed +200/+350/+450 states.
- Build/shared contract checks, 17 Studio tests, 11 source/owner tests and five sprint tests pass.
- Actual images inspected. Visible catalog tint mismatch corrected before final capture.
- Offline comparison: 32 image selections and six plans checked on desktop/mobile, with no script errors.

Exact source provenance

```
Base master: cfb7e8dee8621280c87121b6e60f7bb908b12695
Render checkout: eca99e1631730d874b06c0ec9d8644f0a07864a9
Source: scene-9cf45a73
Distinct saved cloud: scene-4821689 / v55
Source bytes SHA-256: ec05e4fe7c0e15b3555107da4ac5628894df7fcddb3cee996d3af2fddaa7df63
Canonical Type B v0.2.2 SHA-256:
734b1c36570f27baa930eec481eb109906a1f81684e6fb8f8b6a679fec2b9658
A: scene-9e86635b · B: scene-a7da4c73
```

Final render workflow / artifact · Review PR #62

Before fabrication or construction

Qualified as-built survey; six-person/serving mockup; actual shoe inventory and mechanism; buffet shelves/leaves/load; selected appliance manuals and concurrent-use test; corner/trap/hood/gas/extraction design; wall-44 written approvals and closure details; levels/thresholds/floor samples; real light/TV-glare trials; owner/family material/budget acceptance; coordinated shop drawings, BOQ and explicit release.

> **Master, working snapshot, approval registry and production cloud scene remain unchanged.** The PR is a review package. Neither merging code nor a successful renderer approves construction.

Use the interactive review for all matched frames and plan states. The evidence ZIP contains original PNGs/metadata, eight sheets, six SVGs, full audit JSON, detailed design review, validation and release checklist.